



# STFT

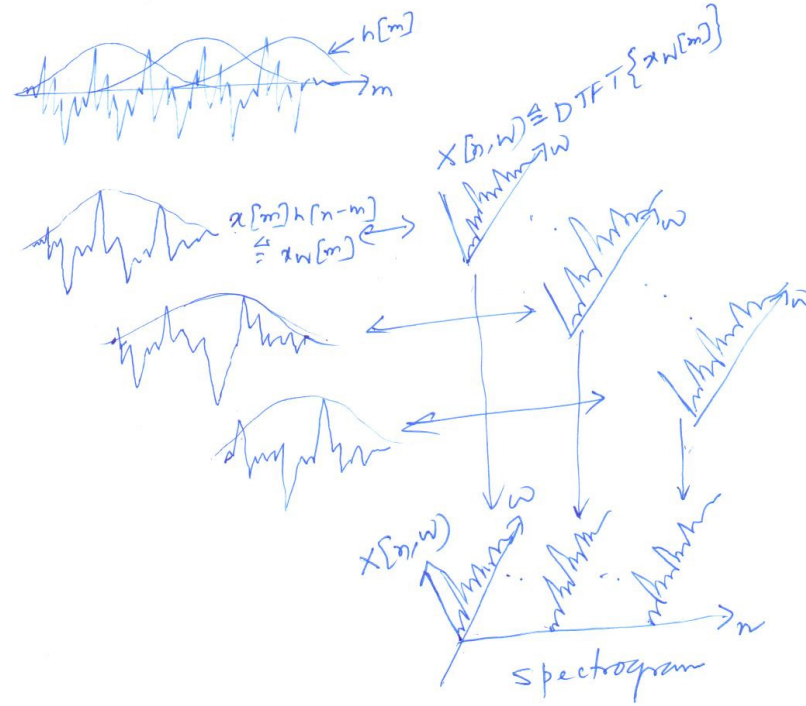


$$X[n, \omega] = \sum_{m=-\infty}^{\infty} x_w[m] h[n-m] e^{-j\omega m}$$

$$x_w[n] = \frac{1}{2\pi} \int_{-\pi}^{\pi} X[n, \omega] e^{j\omega n} d\omega$$


$$X[n, \omega] = \frac{1}{2\pi} \int_{-\pi}^{\pi} H(\theta) e^{j\theta n} X(\omega + \theta) d\theta$$

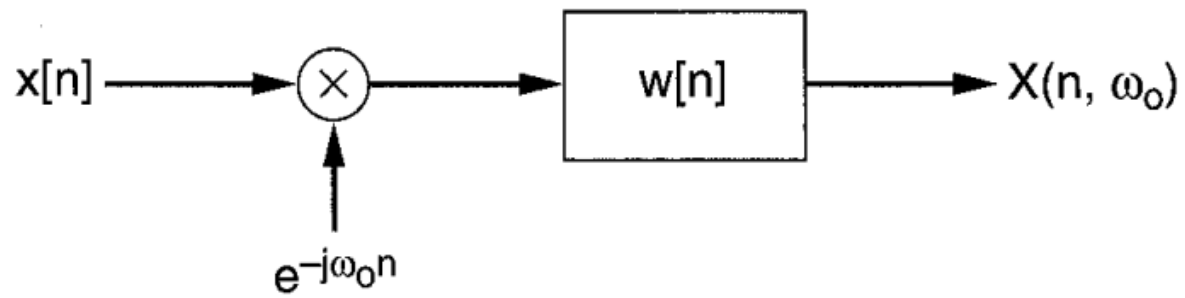

(a)

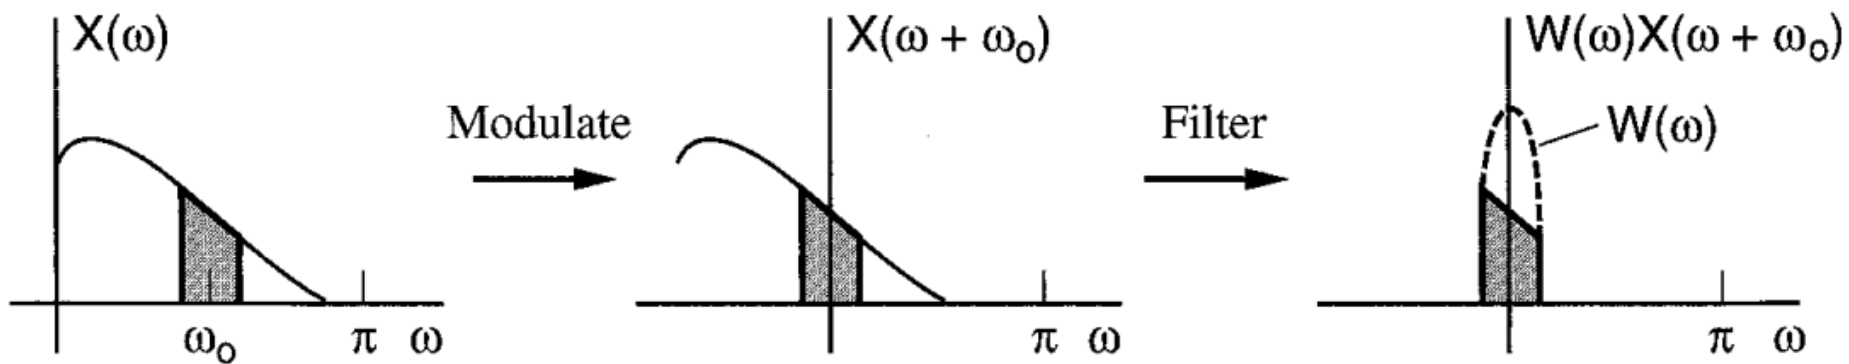

(b)

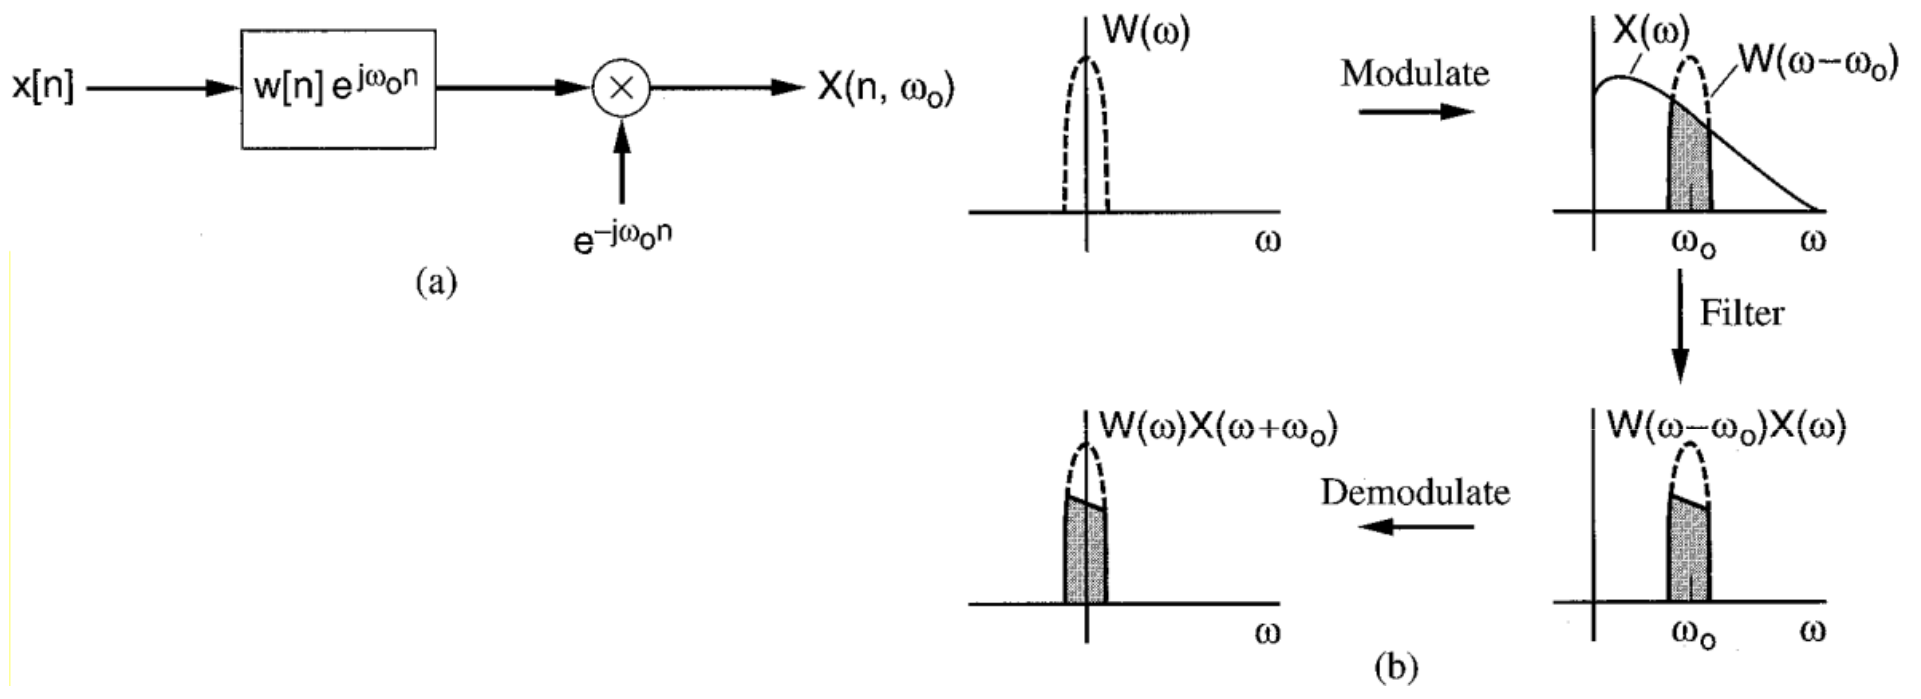

Vertical yellow line on the left side of the page.


### FBS Method

$$y[n] = \left[ \frac{1}{Nw[0]} \right] \underbrace{\sum_{k=0}^{N-1} X(n, k) e^{j \frac{2\pi}{N} kn}}_{\text{Adding Frequency Components For Each } n}$$

Adding Frequency Components For Each  $n$

FBS Constraint:  $\sum_{k=0}^{N-1} W(\omega - \frac{2\pi}{N}k) = Nw[0]$

For  $N_w < N \rightarrow y[n] = x[n]$

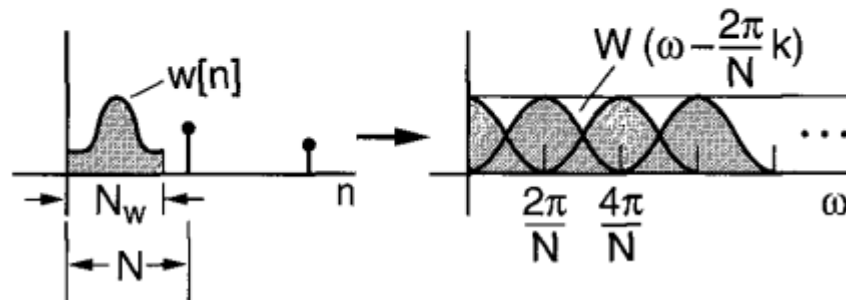

### OLA Method

$$y[n] = \left[ \frac{L}{W(0)} \right] \underbrace{\sum_{p=-\infty}^{\infty} x[n] w[pL-n]}_{\text{Adding Time Components For Each } n}$$

Adding Time Components For Each  $n$

OLA Constraint:  $\sum_{p=-\infty}^{\infty} w[pL-n] = \frac{W(0)}{L}$

For  $\omega_c < \frac{2\pi}{L} \rightarrow y[n] = x[n]$

